


Toggle Clamp system



Install toggle clamp system correctly and insert side wedge through hole. Tighten clamp softly turning it clockwise
Finally turn lever to the other direction about 180° for tightening/locking.
Attention! Turn clamp lever only by hand, do not use any tools. If it feel too tight turn it back 1-2 turns. When parts touching softly you can turn lock ON.

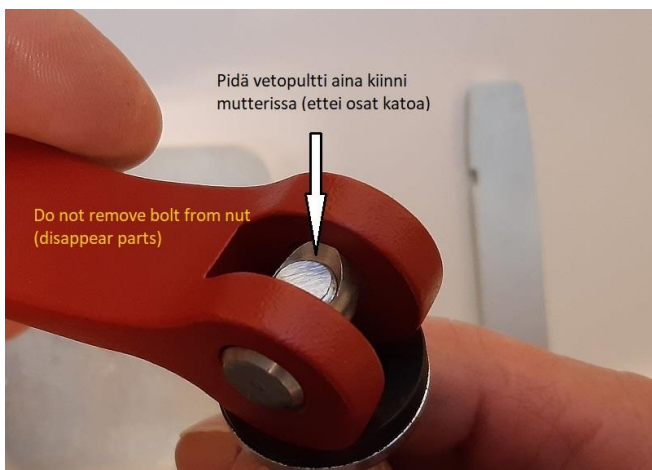

Turn lever 180° for tightening. Clamping force 8 kN

Part List:

1. Toggle clamp + washer + tightening nut
2. Support plate
3. Traction bolt
4. Side wedge

